

PortaJohn®

Phone: 800-521-6310

Web Page: www.PortaJohn.com

Int'l Phone: 586-739-4611

E-Mail: info@toilets.com

No Flush Urinal Set Up Procedure

Set Up Instruction:


Insert Cartridge Into Urinal
Push Down On Cartridge
Cartridge Should be Even
With the Urinal Wall

Initial Sealant Set-Up

Pour 6 Ounces of Sealant
Into Cartridge
Never Dump any Cleaning Fluid
In the urinal without First
Removing the Cartridge
With the Cartridge Tool

Always Wear Gloves When Working
On Any Lavatory Fixtures

No Flush Urinal Cartridge

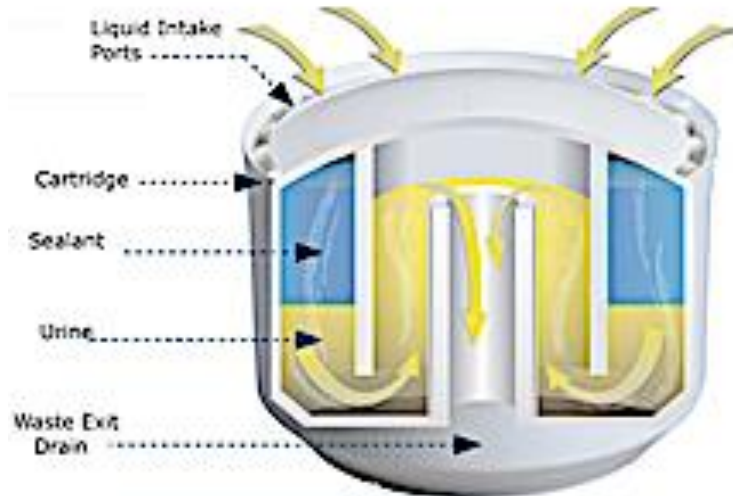


Correct



Cartridge Should Be Flush
With Urinal Base

Wrong

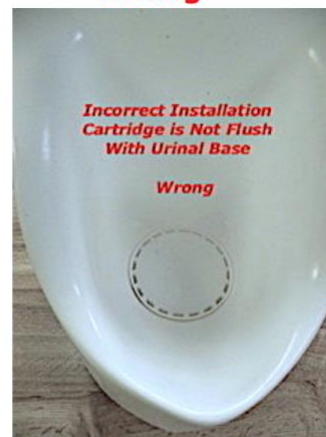

Cartridge Should Not Be
Above Urinal Base

Note: Remove Cartridge with the Cartridge Tool When Cleaning

PortaJohn®

Phone: 800-521-6310

Web Page: www.PortaJohn.com

Int'l Phone: 586-739-4611

E-Mail: info@toilets.com

How to Service and Maintain our No Flush Urinal

Since the no flush urinals do not need water to operate, they have a vertical trap design that incorporates a No Flush Cartridge filled with a layer of No Flush Sealant sitting atop the drain area of the urinal. Urine passes through the cartridge and sealant. As the cartridge fills, it flows under the barrier layer and into the waste line where it is drained.

Since the urinal surface is dry, it helps inhibit bacteria growth and odor and makes the unit easier to clean. In addition, there are no water deposits or rust stains to build up. The cartridge and sealant must be periodically replaced.

Cleaning and maintenance personnel are advised not to pour buckets of liquid, such as dirty mop water, into the urinal. This could wash the sealant through the cartridge and down the drain, causing the urinal to give off odors even after the sealant is replaced. It is always advisable to wear protective gear when working on any lavatory fixture. MSDS documentation is available on all of the products we manufacture. Contact Earl Braxton at info@toilets.com.

Recommended Service Procedure:

Cartridge should last several months and may only need to be changed 3 to 4 times per year. To replace the cartridge:

1. Use the Cartridge Removal Tool to remove the cartridge.
2. Insert it into the trap, gently pulling it out using a back-and-forth motion.
3. Drain any excess liquids from the cartridge down the drain.
4. Pour hot water down the drain to flush any sediment in the line.
5. Clean the urinal with a non-abrasive towel using the No Flush Cleaner.
6. Insert a new cartridge and add 10 ounces of water and fill with 6 ounces of sealant.



No Flush Urinal Kit Cleaning Procedure

1. Wear gloves to clean any restroom fixtures.
2. Do not pour excess soiled water over the No Flush Urinal Cartridge or down the drain after removal of the No Flush Urinal Cartridge.
3. Remove any foreign objects in the No Flush Urinal. The No Flush Urinal Cartridge is designed to prevent larger objects from entering the drain area.
4. Use the metal No Flush Cartridge Removal Tool to remove the No Flush Urinal Cartridge.
5. Insert the No Flush Urinal Cartridge into the trap, gently pulling it out using a back and forth motion.
6. With the No Flush Cartridge removed, spray No Flush Cleaner down the drain followed by a gallon of water to rinse out the drain of the No Flush Urinal.
7. Do not use abrasive cleaners, towels or brushes on the No Flush Urinal.
8. Wipe all surfaces with a soft rag impregnated with the No Flush Urinal Cleaning Solution.
9. Wipe clean with a dry soft cloth or wait for the No Flush Urinal surface to air dry.
10. Insert a new No Flush Urinal Cartridge, (**be sure to push the No Flush Cartridge down Flush with Urinal Base**). Fill the No Flush Urinal Cartridge with 10 ounces of water followed with 6 ounces of the No Flush Sealant.

60 PERCENT WATER SAVINGS

The combination of the No Flush Urinal, the 9 second automatic water faucet shut off and the two-button toilet flush will save 60% water usage.